


SNS45 Construction Stapler

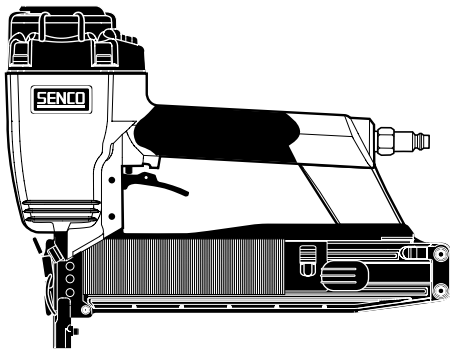

The lightweight SNS45 Stapler from Senco[®] is simply built to last. With 30% fewer parts and 15% more power, it's one stapler you won't want to put down. Weighing just 5.1 pounds, it has the best power-to-weight ratio in its class. Plus, it fires at a rate of 15 staples per second.

Applications:

For on-site and manufactured housing, for roof and floor decking, sheathing, subflooring, fascia and soffits, lathing, fencing, cedar shingles. Also for furniture frames, boxes, crates, pallets, and pallet repair.

Features:

- Best in class power-to-weight ratio
- 30% fewer parts for reliability
- 15% more power
- Drives 16-gauge staples from 1" to 2"
- Drives 15 staples per second
- Weighs just 5.1 pounds
- Adjustable depth-of-drive
- Easy-open latch provides quick and easy clearing of occasional jams
- Available in Dual Action and Restrictive Trigger
- One year warranty



NEW!

SENCO®

SNS45 Construction Stapler

Tool Specifications:

Weight: 5.1 lbs.
 Height: 11"
 Length: 14"
 Lip Length: 1"
 Staple Capacity: 160
 Operating Pressure: 80-120 psig
 Mode of Operation: Tool is available with either Restrictive Trigger or Dual Action activating mechanism. *
 Fitting: 3/8" NPT




Fastener Specifications:

Staples: 16-Gauge, 7/16" Crown



Product Codes	N13	N14	N15	N16	N17	N18	N19	N21
Lengths								
Inches	1	1 1/8"	1 1/4"	1 3/8"	1 1/2"	1 5/8"	1 3/4"	2"
Millimeters	25	28	32	35	38	41	44	50

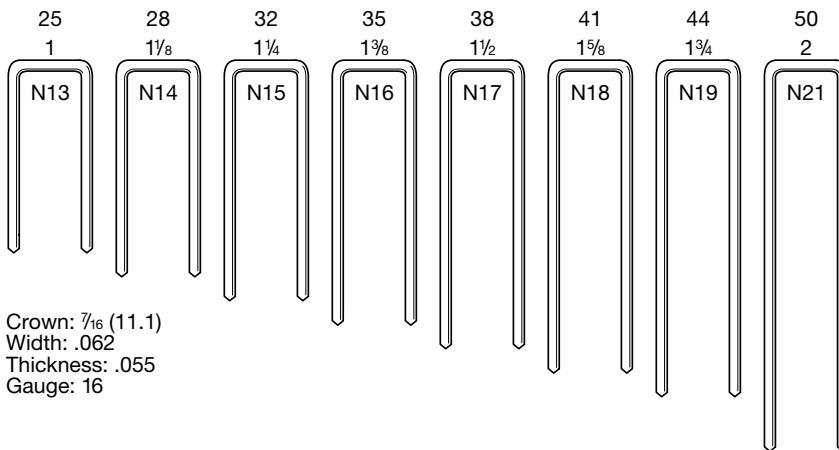

* "Restrictive Trigger" activated tools are used for applications where precision nail or staple placement is desired. You must first depress the safety element where you want to drive a nail or staple and then pull the trigger. After each nail or staple is driven, completely release the trigger and lift the tool off the work surface.

"Dual Action" activated tools are used for applications where high-production work is desired. There are two modes of operation:

Bottom Fire Method: This method of operation is sometimes called bounce firing. You must keep the

trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element where you want to drive a nail or staple.

Trigger Fire Method: First depress the safety element where you want to drive a nail or staple and then pull the trigger.

For instructions on safe use of tools with either of these activating mechanisms, please refer to the Operating Instructions or Customer Satisfaction and Safety Reminder contained in your tool carton.

For additional information on how Senco fastening systems will save you time, reduce costs, and increase quality, call your nearest Authorized Senco Dealer or

Distributor listed in the Yellow Pages under "Staples," or call our toll-free Action Line: 1-800-543-4596.