

SQS55 Rugged Duty 15 Gauge Stapler



The new SENCO SQS55 Stapler has all the power and speed needed for the toughest framing and sheathing applications. Designed with today's harder woods and laminates in mind, this rugged stapler will stitch the full line of SENCO 15 gauge staples.

Applications:

Framing and sheathing.

Features:

- Amazing power, especially considering the tool's weight and balance.
- High speed – capable of driving at the rate of 15 staples per second.
- Adjustable power – may be varied by up to 20% for soft wood applications.
- Adjustable depth of drive allows precise setting of the staple.
- Replaceable guide body wear insert improves durability and quality of drive.
- Lightweight and well balanced at only 5.9 lbs. (2.7kg).
- Wide fastener range, from 1.25" to 2.5" (32mm to 65mm).
- 25% fewer parts than many competitive models.
- Simplified, reliable valving.
- Top loading, easy release feed system with reload indicators.
- Adjustable exhaust directs exhaust air in any direction.
- EZ Clear feature to clear infrequent jams.
- Available in restrictive trigger or dual action trigger.

Tool Specifications:


Tool Weight: 5.9 pounds (2.7kg)
 Height: 12" (304mm)
 Length: 14.375" (365mm)
 Width: 3.6" (91mm)
 Lip Length: 1" (25mm)
 Magazine Capacity: 130 staples
 Operating Pressure: 70 - 120 psig (4.76 - 8.16 bar)
 Mode of Operation: Tools are available in either dual action or restrictive trigger modes.*
 Hose Fitting: 3/8" NPT

For additional information on how SENCO fastening systems will save you time, reduce costs and increase quality, call your nearest Authorized SENCO Dealer or Distributor listed in the Yellow Pages under "Staples", or call our toll-free Action Line at 1-800-543-4596. You can also visit our website at www.senco.com.

Fastener Specifications:

15 Gauge 7/16" Crown Staples

Product Codes	Q15	Q17	Q19	Q21	Q23	Q25
Length in Inches	1-1/4"	1-1/2"	1-3/4"	2"	2-1/4"	2-1/2"
Length in Millimeters	32mm	38mm	44mm	50mm	57mm	65mm

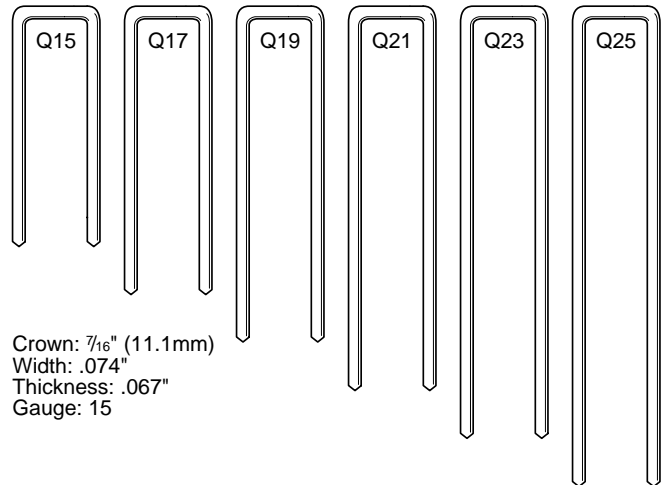

* "Restrictive Trigger" activated tools are used for applications where precision nail or staple placement is desired. You must first depress the safety element where you want to drive a nail or staple and then pull the trigger. After each nail or staple is driven, completely release the trigger and lift the tool off the work surface.
 "Dual Action" activated tools are used for applications where high-production work is desired. There are two modes of operation:
 Bottom Fire Method: This method of operation is sometimes called bounce firing. You must keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element where you want to drive a nail or staple.
 Trigger Fire Method: First depress the safety element where you want to drive a nail or staple and then pull the trigger.
 For instructions on safe use of tools with either of these activating mechanisms, please refer to the Operating Instructions and Customer Satisfaction and Safety Reminder contained in your tool carton.

©1998 SENCO Products, Inc. • 8485 Broadwell Road • Cincinnati, Ohio 45244